



1100 Series

Diesel Engine - ElectropaK

1104C-44TAG2

98 kWm 1500 rev/min
112 kWm 1800 rev/min



Building upon Perkins proven reputation within the power generation industry, the newly introduced 1100 Series range of ElectropaK engines now fit even closer to the needs of their customers'.

In the world of power generation success is greeted for those providing more for even less. Therefore with this new 1104C-44TAG2 unit, Perkins has engineered for its customers even higher levels of reliability, yet lowered the cost of ownership. And with six cylinder capability from a four cylinder package performance increases, but crucially, bare engine noise is lower than ever before.

Rapid starting and pick-up are naturally built-in especially for cold operation, but where legislation or local markets demand an emissions capability, then the 1104C-44TAG2 satisfies US EPA Tier 2 mobile off-highway legislation; elsewhere the engine is designed to comply with TA Luft regulations.

1100 Series see the marriage of technology to customer need. A 4.4 litre unit very quietly setting a new standard in prime power supply and standby for the power generation industry.

Compact and efficient power

1100 Series is the fruit of an intensive period of customer research with which to guide the development of the range. A new 4.4 litre, 4 cylinder block ensures bore roundness is maintained under the pressures of operation, it also ensures combustion and mechanical noise is lowered. A new cylinder head re-established Perkins mastery of air control to match with charged cooled turbocharged performance hitting generator output nodes previously requiring 6 litres or more.

Cleaner and quieter power

The 1104-44TAG2 has a structure that has led to an exceptionally low noise signature, useful to both packager and the environment. To meet other environmental needs, high pressure fuel from an advanced technology rotary distribution pump is cleanly burned with air charge cooled, swirl conditioned and delivered through a cross flow head.

Quality by design

Product design and Class A manufacturing improvements have been implemented to enhance product reliability to the needs of today, while maintaining Perkins legendary reputation for durability.

Cost effective power

The compact package and low noise brings benefit to the manufacturer, while lower fuel consumption and oil use, along with 500 hour service intervals and a two year warranty are set to match user needs now, and into the future.

Product support

Total worldwide service continues to be provided through a network of 4000 distributors and dealers. This is now enhanced by the introduction of TIPSS (The Integrated Parts and Service System), which represents a step change in diesel engine support. TIPSS enables customers to specify and order parts electronically as well as service engines with on-line guides and service tools.

Engine speed rev/min	Type of Operation	Typical generator output (net)		Engine power			
				Gross		Net	
		kVA	kWe	kWm	bhp	kWm	bhp
1500	Prime power	100	80	93.5	125.5	89	119
	Standby (maximum)	110	88	103	138	98	131.5
1800	Prime power	112.5	90	105	141	100	134
	Standby (maximum)	125	100	118	158	112	150

The above ratings represent the engine performance capabilities to conditions specified in ISO 8528/1, ISO 3046/1:1986, BS 5514/1.

Derating may be required for conditions outside these; consult Perkins Engines Company Limited.

Fuel specification: BS 2869 Class 2 or ASTM D975 D2. **Lubricating oil:** API CH4/ACEA E5.

Generator powers are typical and are based on typical alternator efficiencies and a power factor and a power factor (cos θ) of 0.8.

Rating Definitions

Prime power – Power available for variable load in lieu of a main power network. Overload of 10% permitted for 1 hour in every 12 hours operation.

Standby (maximum) – Power available at variable load in the event of a main power network failure. No overload is permitted.

1100 Series

1104C-44TAG2



Standard ElectropaK Specification

Air Inlet

Mounted air filter

Fuel System

Rotary type pump
Ecoplus fuel filter

Lubrication System

Wet cast iron sump with filler and dipstick
Spin-on oil filter

Cooling System

Thermostatically-controlled system with gear-driven circulation pump and belt-driven pusher fan
Mounted radiator and piping incorporating air-to-air charge cooler

Electrical Equipment

12 Volt starter motor and 12 Volt 65 Amp alternator with DC output
12 Volt shutdown solenoid energised to run
Glow plug cold start aid

Flywheel and Housing

Flywheel to SAE J620 size 10/11½
SAE 3 flywheel housing

Literature

User's Handbook

Optional Equipment


24 Volt alternator
24 Volt starter motor
Workshop manual
Parts book

General Data

Number of Cylinders	4
Cylinder Arrangement	Vertical in-line
Cycle	4 stroke
Induction system	Turbocharged, air to air charge cooled
Combustion System	Direct injection
Cooling System	Water-cooled
Bore & Stroke	105 x 127 mm
Displacement	4.41 litres
Compression Ratio	18.2:1
Direction of Rotation	Anti-clockwise viewed on flywheel
Total Lubrication System Capacity	8.0 litres
Total Coolant Capacity	12.6 litres
Length	1259 mm
Width	721 mm
Height	966 mm
Dry Weight (ElectropaK)	550 kg

Fuel consumption litres/hour (gallons*/hour)		
Power rating %	1500 rev/min	1800 rev/min
110	24.9 / 5.5	29.7 / 6.6 (7.85)
100	22.6 / 5.0	26.9 / 5.9 (7.11)
75	17.1 / 3.8	20.2 / 4.5 (5.34)
50	11.2 / 2.6	14.1 / 3.1 (3.72)

* (US Gallons)

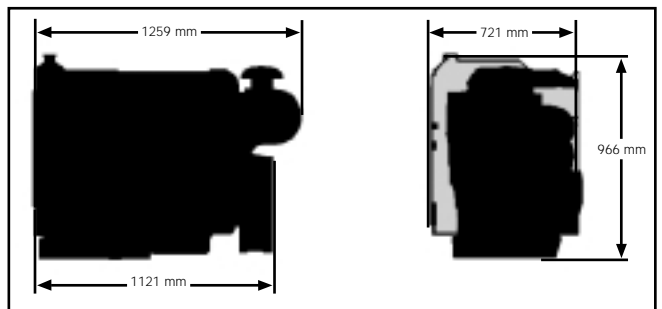

Distributed by



Perkins Engines Company Limited

Peterborough PE1 5NA
United Kingdom
Telephone +44 (0)1733 583000
Fax +44 (0)1733 582240
www.perkins.com

All information in this document is substantially correct at the time of printing but may be altered subsequently by the Company